

# ACCEN VERTIC LINE




**Vertic Line is a vertical fall protection system used on ladders and vertical passageways. The system is attached to the ladder rungs by means of special brackets. The upper point is equipped with a special shock absorber that suppresses the forces generated when the worker falls off. The maximum user weight is 150 kg.**

The system is equipped with a special trolley that is attached to the 8 mm guide rope, the user attaches the trolley to the belaying point in his harness. We attach the intermediate points of the system every 10 m. In the case of a roof exit, an elongated end point can be installed in the system, resulting in a safe exit from the ladder. It meets the requirements of EN 353-1 and is approved for installation in EX zones, with an ATEX certificate.

Type:	System Vertifix Life Line System
Norm:	EN353-1:2014+A1:2017 & EN 795:2012 typ A
Certification:	DEKRA EXAM GmbH,
Material:	INOX

# ACCEN VERTIC LINE

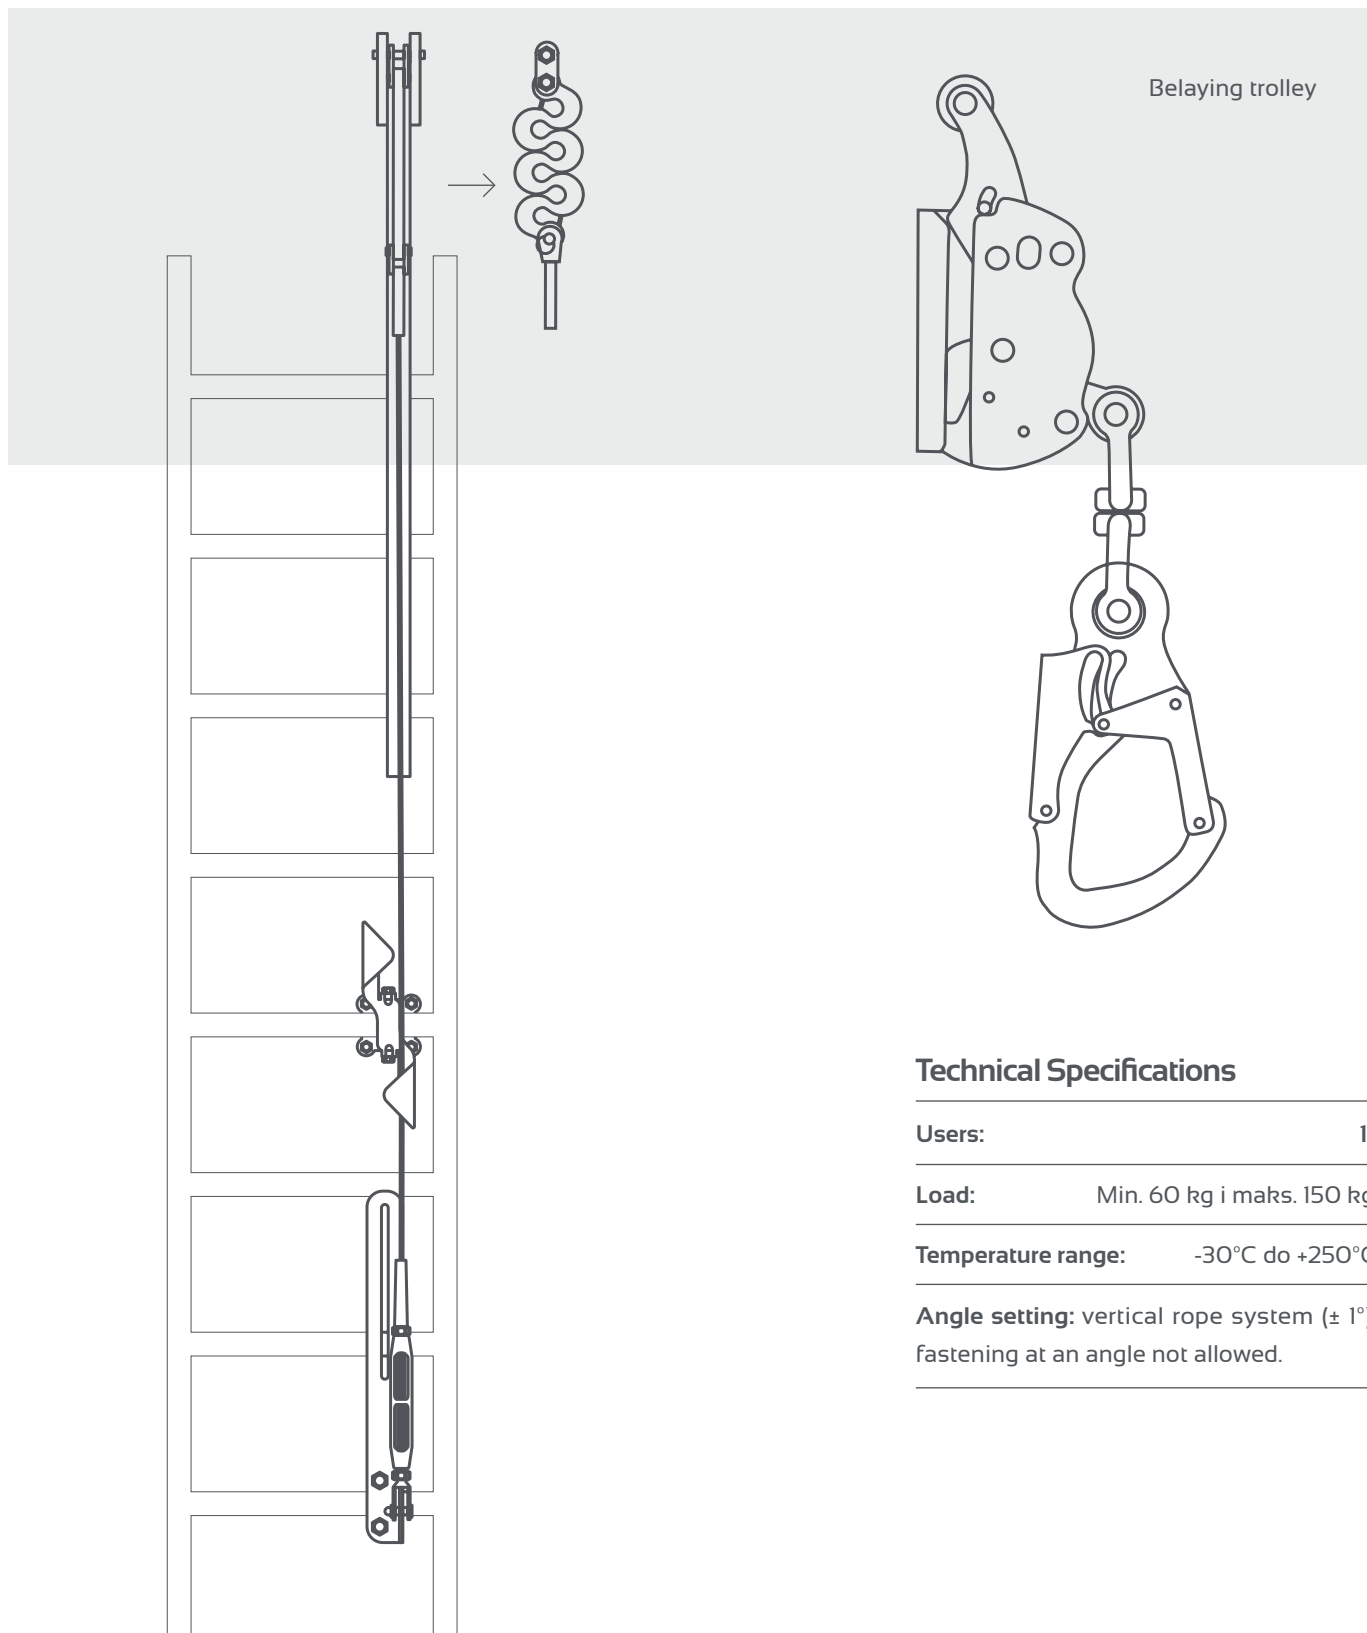

## Technical Specifications

Users:	1
Load:	Min. 60 kg i maks. 150 kg
Temperature range:	-30°C do +250°C
Angle setting:	vertical rope system ( $\pm 1^\circ$ ), fastening at an angle not allowed.