


TRAX CLAMP

Safety point

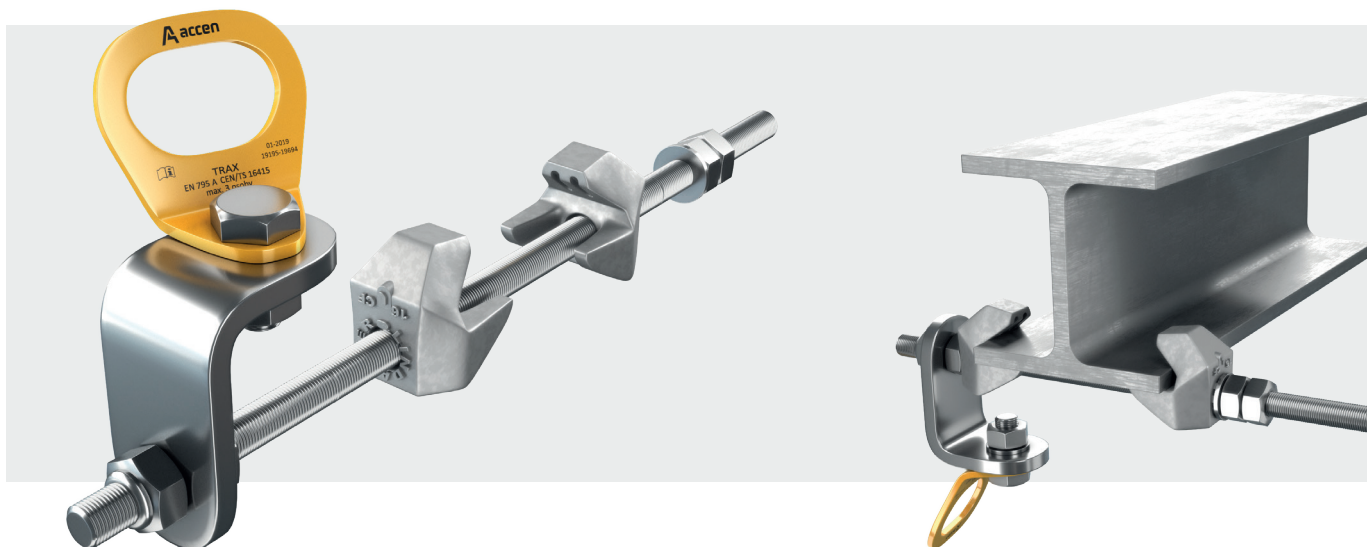

Anchoring point TRAX CLAMP is an anchoring device mounted to steel T-sections (T-beam and I-beam), intended for attaching devices of individual protection to prevent from falling from a height for maximum three persons at the same time. It comes in two installation versions - TRAX CLAMP and TRAX CLAMP XL.

The anchoring point TRAX CLAMP complies with the requirements of the standard EN 795: 2012 type A/C and Technical Specification CEN/TS 16415: 2013. Attachment is made by means of system clamps CF type. Spacing range of CF clamps allows the assembly range 80-320 mm with the profile thickness 8-16 mm (TRAX CLAMP) and 15-25 mm (TRAX CLAMP XL). The anchoring device can be used as an independent anchoring point or as support to AccenLine rope system.

Specification


Material	INOX
Weight	2 kg
Size	8-16 mm
Users	3
Standard	EN 795 A/C, CEN/TS 16415
Warranty	12 months

Base for assembly

TRAX CLAMP	
Steel T-sections	8-16 mm
TRAX CLAMP XL	
Steel T-sections	15-25 mm

TRAX CLAMP

A=80-320mm
B=8-16mm

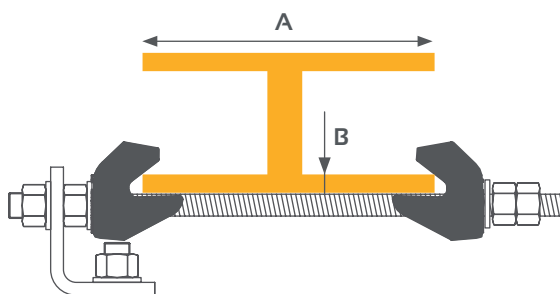

TRAX CLAMP XL

A=80-320mm
B=15-25mm

