


# TRAX ST

safety post

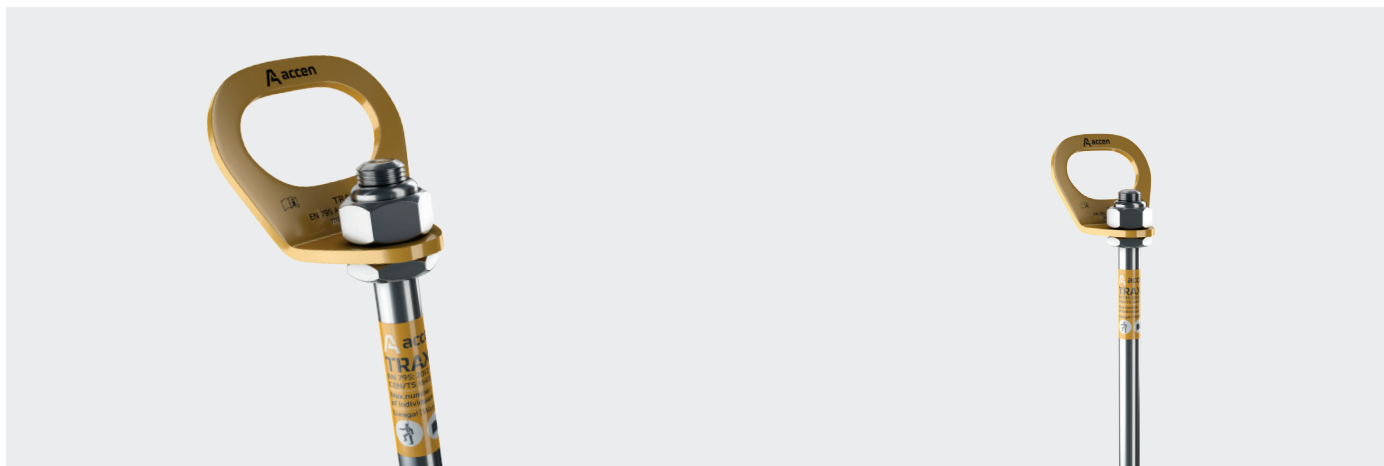

The TRAX ST belaying post is intended for use as an anchoring point protecting from falling from a height for three people at the same time.

Mounted to steel structures, I-sections, channel sections, etc. with a minimum wall thickness of 6 mm. On the post there is a fastening point with a swivel allowing 360° rotation in all directions. This prevents the formation of loops when the safety line is fastened.

It can be used as an intermediate post for mounting AccenLine horizontal safety systems.

TRAX ST is made of stainless steel (material 1.4301). Diameter 16 mm. Maximum height 1000 mm.

The TRAX ST anchor point meets the requirements of the standard for anchor devices EN795 class A/C and CEN / TS 16415.



## Specification

Material	INOX
Weight	0,5 kg
Size	200-1000 mm
Diameter	16 mm
Users	3
Standard	EN 795 A/C, CEN/TS 16415
Warranty	12 months

## Mounting substrates

Steel structures	min. thickness 5 mm
------------------	---------------------