

# TRAX LIGHT TR


Safety point



TRAX LIGHT TR is an anchoring point mounted to trapezoidal or steel sheets, intended for attaching devices of individual protection to prevent from falling from a height for one person.

The anchoring point TRAX LIGHT TR complies with the requirements of the standard related to anchoring devices EN 795 type A. It is permanently fixed to trapezoidal sheets of minimum thickness 0,75 mm, or to steel sheets of minimum thickness 0,75mm. Assembly is made by means of 1 tilting anchor MS-SKD. It is allowed to use only the anchors supplied by the manufacturer.

The device is made from stainless steel 1.4301. Together with the TRAX badge, the point is 130 mm high and 80 mm wide. The diameter of assembly screw is 8 mm.

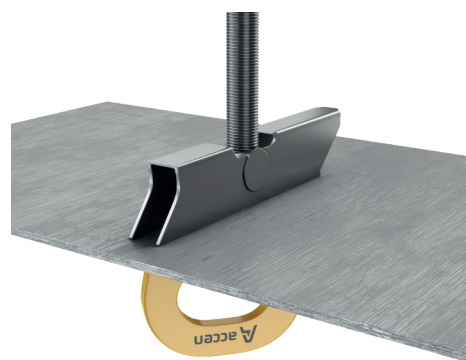

## Specification

Material	INOX
Weight	0,2 kg
Size (anchor+badge)	80x130 mm
screw diameter	8 mm
Users	1
Standard	EN 795 typ A
Warranty	12 months

## Base for assembly

trapezoidal sheets	min. thickness 0,75mm
steel sheets	min. thickness 0,75mm